


# B7TURBOEXIR

HD 720p Turbo HD Bullet Camera

**epcom**<sup>®</sup>  
POWERED BY HIKVISION

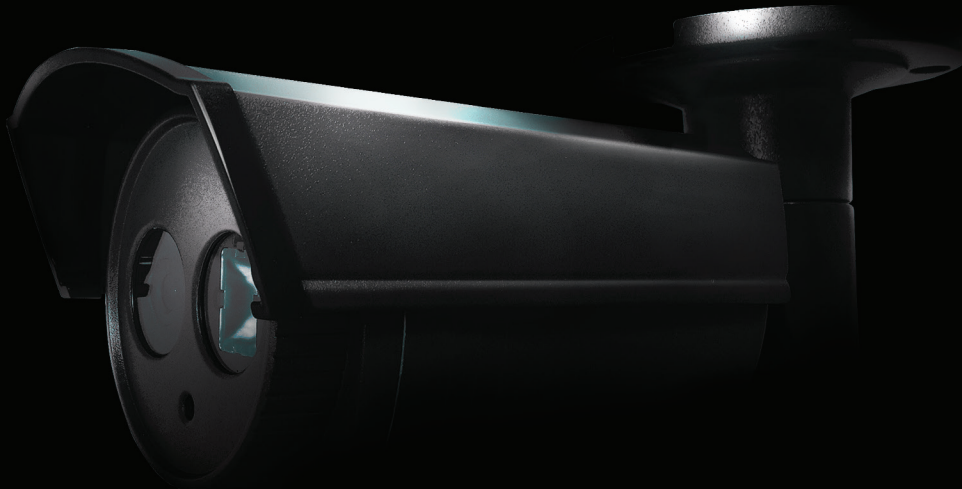

## ► Camera

Image Sensor	1/3" Progressive Scan CMOS
Signal System	PAL / NTSC
Effective Pixels	1280(H)*720(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter Speed	1/25 (1/30)s to 1/50,000 s
Lens	3.6mm (2.8mm, 6mm, 8mm optional) Angle of view: 76.88° (3.6mm),99.73°(2.8mm), 50.1° (6mm), 36.8° (8mm)
Lens Mount	M12
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	25 fps / 30 fps
HD Video Output	1 Analog HD output
S/N Ratio	More than 52dB

## ► General



Working Temperature/ Humidity	-40°C-60°C(-40°F-140°F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 3W
Weather Proof Ratings	IP66
IR Range	Up to 40m
Dimensions	94.6×83×210.8mm(3.72"×3.27"×8.30")
Weight	700 g (1.54 lbs)

## ► Key Features

HD720p video output
Adopt HDTVI Technology
True Day/Night, Smart IR
EXIR technology, 40m IR distance
IP66 weatherproof



**EV**TURBOHD  
series

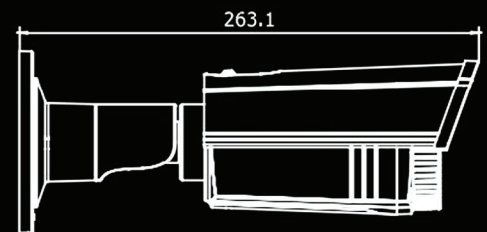

Unit: mm